




CORE DRILL 3-SPEED HYDRAULIC 3.6 HP MOTOR

Hand-held or Rig Mounted

Model 2-1317-0030 is a heavy-duty hydraulic core drill. This wet diamond drill delivers outstanding performance in concrete, reinforced concrete, etc. The oil flow control is self regulating. The required volume is 6 gpm. Flow above 6 gpm up to 13.2 gpm is by-passed back to the tank. The drill features a 3-speed gear box, mechanical slip clutch, 360° rotatable side handle and centering aid.

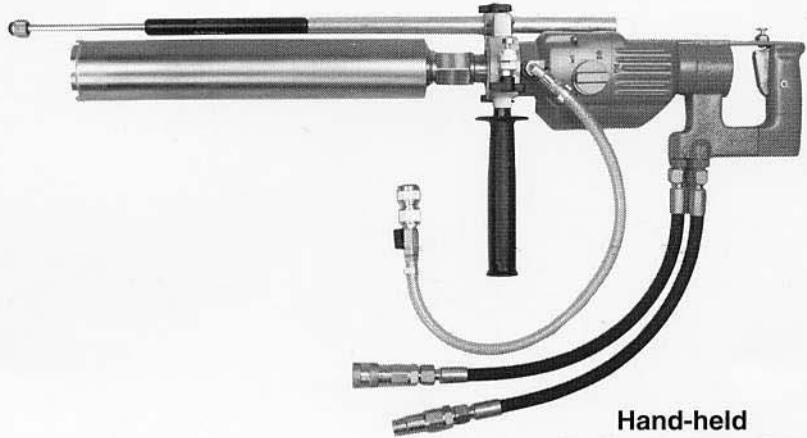

**Hand-held
Hydraulic Core Drill
w/Centering Aid**
Model No. 2-1317-0030

Technical Specifications:

3-Speeds (RPM):	380 / 900 / 1800
Connecting Threads:	1-1/4" UNC, 5/8" UNC & 1/2" G
Weight:	16 lbs.
Oil Pressure:	2000 psi
Oil Flow:	6 gpm (22 lpm)
Flow Control Valve:	Up to 13.2 gpm allowed
Safety Friction Slip Clutch	

Drilling Capacity:

- ◆ Hand-held Drilling: 1/2" – 3" dia.
- ◆ Rig Mounted Drilling: 1/2" – 6" dia.*

Standard Equipment:

- ◆ Centering Aid 2-1315-6800
- ◆ Metal Carrying Case 5-1202-9888

Optional Accessories:

- ◆ Anchor Stand 256-955E
- ◆ Vacuum Pump, 110V, 253-511
- ◆ Portable Water Tank, 3.5 gal. 251-623
- ◆ Clamp for Pipes 2-1413-8500
- ◆ Unitec Thin Kerf Diamond Core Bits

**Ideal for use with our Model No. HP-1 Power Unit
for portable hydraulic power tools.**

- * Do not use core bits larger than 6" dia.
- * Use gear 1 in a drill stand only.



**Rig Mounted
Hydraulic Core Drill
Drill & Anchor Stand
Drill, Stand & Vacuum**
Model No. 2-1317-0030 SA
2-1317-0030 SV

CS UNITEC, Inc.

22 Harbor Avenue, Norwalk, CT 06850
Toll Free: (800) 700-5919 (203) 853-9522 Fax: (203) 853-9921
Website: www.csunitec.com E-Mail: info@csunitec.com