



Drive Units - High Torque

Pneumatic and hydraulic: high torque and slow speed for special driving and tapping applications

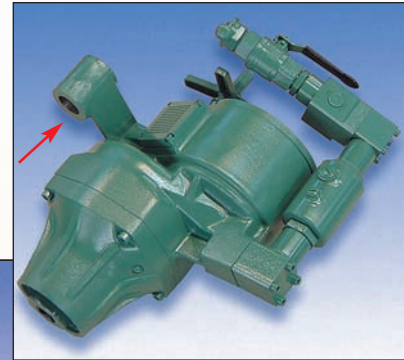

- Both Pneumatic and Hydraulic models available
- Integrated torque reaction stabilizers
- One-year warranty

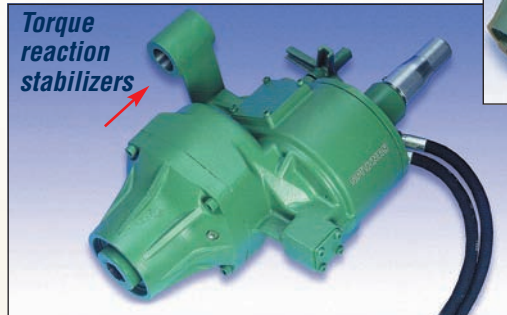

Custom Designs Available

Hydraulic Drive Unit Model No.	Square Drive	Stall Torque at 90 PSI (ft-lbs.)	Free Speed (RPM)	Load Speed (RPM)	Power (HP)	Oil Flow (GPM)	Oil Pressure (PSI)	Side to Center Distance (inches)	Weight (lbs.)	Connection Quick Couplers
2 2090 0010	3/4" F	376	40	20	1.5	4 - 13	1000	2.2	28	1/2" FF
2 2810 0010	1-1/8" F	1550	24	12	3.5	4 - 13	1000	3.6	77	1/2" FF

Pneumatic Drive Unit Model No.	Square Drive	Stall Torque at 90 PSI (ft-lbs.)	Free Speed (RPM)	Load Speed (RPM)	Power (HP)	CFM at 90 PSI	Side to Center Distance (inches)	Weight (lbs.)	Air Connection (inches)	Hose ID (inches)
2 2804 0010	1-1/8" F	1327	40	20	5	141	3.6	82	NPT 1"	1"

Chisel Scalers / Needle Scalers

Pneumatic: Ideal for chipping and removing metal, stone, concrete and brick, as well as carving wood

- Use in oilfields, fabrication shops, petrochemical plants, construction sites and foundries
- Chisel scalers are general-purpose hammers for chipping stone, metal, concrete, brick and for carving wood
- Needle scalers are ideal for removing weld splatter, rust, paint and other debris from many surfaces and hard-to-reach places



Model CSU-182LNS
Needle Scaler with Lever Throttle
Push throttle hammers also available.

Non-sparking CuBe needles (Ex308-319B) available.



Model CSU-1BLNS
Needle Scaler with Lever Throttle

Non-sparking CuBe needles (Ex308-319B) available.

Non-sparking Needles – CuBe

Copper Beryllium non-sparking needles available for CSU-182LNS and CSU-1BLNS.

Ex308-319B - 7" long needle, 19 per pack

Ex308-3100B - 7" long needle, 100 per pack