


Woodboring Air Drills, Reversible


Heavy-duty power for underwater drilling and other wood boring applications

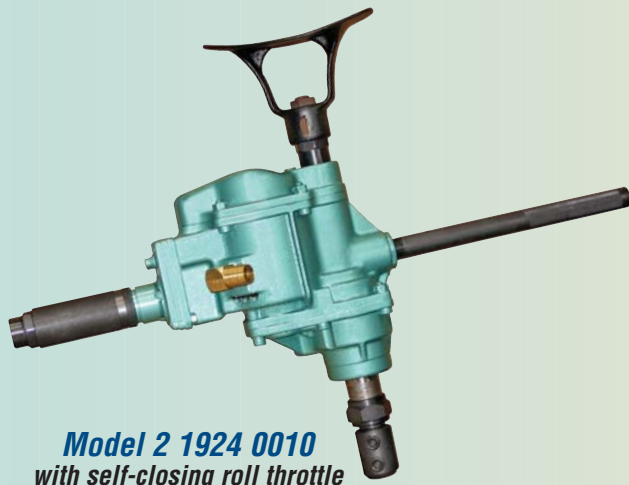

Model 2 1924 0010
with self-closing roll throttle
Up to 2" for boring wood

- Ideal for drilling wood in marine timbers, underwater use and railroad repair work
- Thrust bearing support for long life and efficient operation
- Lever throttle and durable spur gearing
- Breast plate and dead handle included
- Includes threaded exhaust port
- Use underwater with Air Tool Line Conditioner (shown below)

Accessories and woodboring drill bits from 1/2" dia. to 1 1/8" dia. in lengths from 12" to 36"



Model 2 1903 0010
with lever throttle
Up to 1" for boring wood

	Model 2 1903 0010	Model 2 1924 0010
Capacity in wood	1" Diameter	2" Diameter
Reversible	Yes	Yes
Power	2 HP	3 HP
Chuck Style	1/2" Woodboring	1/2" Woodboring
Spindle	Stub Taper	#2 Morse Taper
Free Speed	750 RPM	700 RPM
Recommended Hose Size	1/2"	1/2"
Overall Height	17 1/2"	18 1/2"
Weight	14 1/2 lbs.	24 3/4 lbs.
Air Inlet Thread	1/2" ID	1/2" ID
Air Exhaust Thread	1/2" NPT	1/2" NPT
Air Consumption at 90 PSI	39 CFM	50 CFM

AirPac Extends life of pneumatic power tools



- Removes moisture and dirt from air lines; a float valve automatically ejects water and dirt
- Includes automatic oiler; prevents tools from freezing in cold environments
- Eliminates air motor downtime caused by water and dirt
- Connections for two tools; max. air flow 185 CFM



Air Tool Line Conditioner

Underwater air tool conditioner for marine applications. Displaces moisture and inhibits rust/corrosion of air motors.

MS 9105 – 1 quart/liter