

# 9" Cut-off Saw with Dust Extraction



- Quick, precise cutting of concrete, masonry, block, brick, stone and more
- Adjustable cutting depth of 0" to 2 1/2"
- Accepts Diamond saw blades up to 9"




Optional carrying case  
Order No. 492.058

- Higher visibility for increased worker output and accuracy
- Dust extraction with CS 1225 vacuum makes for cleaner working conditions
- Dust exhaust guard rotates for upcut or downcut

Model A20/4	
Power (110 Volt or 220 Volt)	15 Amp
RPM (No Load)	4500
Depth of Cut	0-2 1/2" max.
Max. Blade Capacity	9"
Arbor	7/8"
Weight	15 lbs.
Saw with 9" Diamond Blade	Order Model A20/4D
Diamond Blade (9" x .095")	Order No. 255.753

## AirPac Extends life of pneumatic power tools

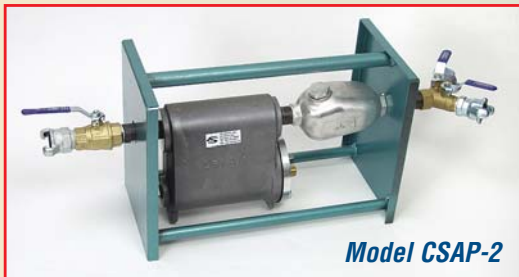

Model CSAP-2

- Removes water and contaminants from both portable and stationary compressed air systems to protect pneumatic tools
- Totally automatic – a float valve automatically ejects the accumulated water and dirt
- Maintenance-free – no filters or parts to replace or service

### How it Works:

- Air compressors compress air into small areas – this causes heat, which contains moisture
- As heated air travels through air lines, it cools, creating water droplets
- When this air/water mixture enters the AirPac, it travels through a baffle that traps the water and dirt and drops it into a holding area
- When enough water is accumulated, a float allows the water and dirt to be automatically ejected
- Dry air then enters the lubricator and is mixed with oil and sent to the tool

- Includes automatic 1/2 pint oiler; prevents tools from freezing in cold environments
- Two tool outlets; Chicago couplings on all connections
- Weighs 40 lbs., max. air 185 CFM
- Use Air Tool Lubricant for best results – see below for more information

## Air Tool Lubricant – Non-toxic

CS Unitec offers three types:

**ProLube-ATL:** A super-premium synthetic air tool lubricant; provides maximum lubrication, cleaning and protection for portable air tools.

**ProLube-ATL/AF (anti-freeze):** ProLube-ATL/AF blend that prevents freezing and is ideal for operating air tools in cold climate conditions.

**Air Tool Line Conditioner:** For use in underwater air tools. Displaces moisture. Developed to inhibit rust and corrosion of air motors.



### ProLube-ATL

1 gallon bottle Order No. CS 7043-001	Case (4 bottles) Order No. CS 7043-002
------------------------------------------	-------------------------------------------

### ProLube-ATL/AF

1 gallon bottle Order No. CS 7049-001	Case (4 bottles) Order No. CS 7049-002
------------------------------------------	-------------------------------------------

### Air Tool Line Conditioner

1 quart/liter bottle Order No. MS 9105
-------------------------------------------