


AirPac Extends life of pneumatic power tools

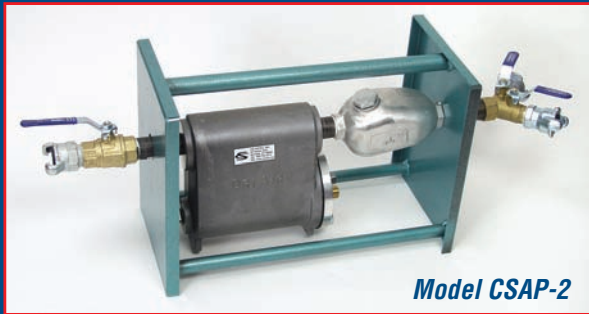

How it Works:

- Air compressors compress air into small areas – this causes heat, which contains moisture
- As heated air travels through air lines, it cools, creating water droplets
- When this air/water mixture enters the AirPac, it travels through a baffle that traps the water and dirt and drops it into a holding area
- When enough water is accumulated, a float allows the water and dirt to be automatically ejected
- Dry air then enters the lubricator and is mixed with oil and sent to the tool

- Removes 98% of water and contaminants from both portable and stationary compressed air systems to protect pneumatic tools
- Totally automatic – a float valve automatically ejects the accumulated water and dirt
- Maintenance-free – no filters or parts to replace or service
- Includes automatic 1/2 pint oiler; prevents tools from freezing in cold environments
- Two tool outlets; Chicago couplings on all connections
- Weighs 40 lbs., max. air 185 CFM
- Use Air Tool Lubricant for best results – see below for more information

Air Tool Lubricant – Non-toxic

CS Unitec offers three types:

ProLube-ATL: A super-premium synthetic air tool lubricant. Provides maximum lubrication, cleaning and protection for portable air tools.

ProLube-ATL/AF (anti-freeze): ProLube-ATL/AF blend that prevents freezing and is ideal for operating air tools in cold climate conditions.

Air Tool Line Conditioner: For use in underwater air tools. Displaces moisture. Developed to inhibit rust and corrosion of air motors.



ProLube-ATL

<u>1 gallon bottle</u>	<u>Case (4 bottles)</u>
Order No. CS 7043-001	Order No. CS 7043-002

ProLube-ATL/AF

<u>1 quart bottle</u>	<u>Case (12 bottles)</u>
Order No. CS 7049-003	Order No. CS 7049-004

<u>1 gallon bottle</u>	<u>Case (4 bottles)</u>
Order No. CS 7049-001	Order No. CS 7049-002

Air Tool Line Conditioner

<u>1 quart/liter bottle</u>
Order No. MS 9105