


Finger Belt Sander For Angles and Tight Spaces

Swivel-mounted Arm, 140° Flexibility

**Reach into corners, grooves and folds;
well-suited for pipes and curves.**

The LBS 1105 VE finger belt sander saves time grinding in confined and difficult areas. It uses belt sizes 3/16" to 1-1/8" wide by 21" long. The sanding arm rotates up to 140° for reaching into corners, grooves and folds, including pipes and curves. The finger sander is ideal for grinding, blending, polishing and deburring ferrous and nonferrous metal. It also works on wood, plastic, fiberglass and other material. Speed is adjustable from 13 to 39 ft./sec.

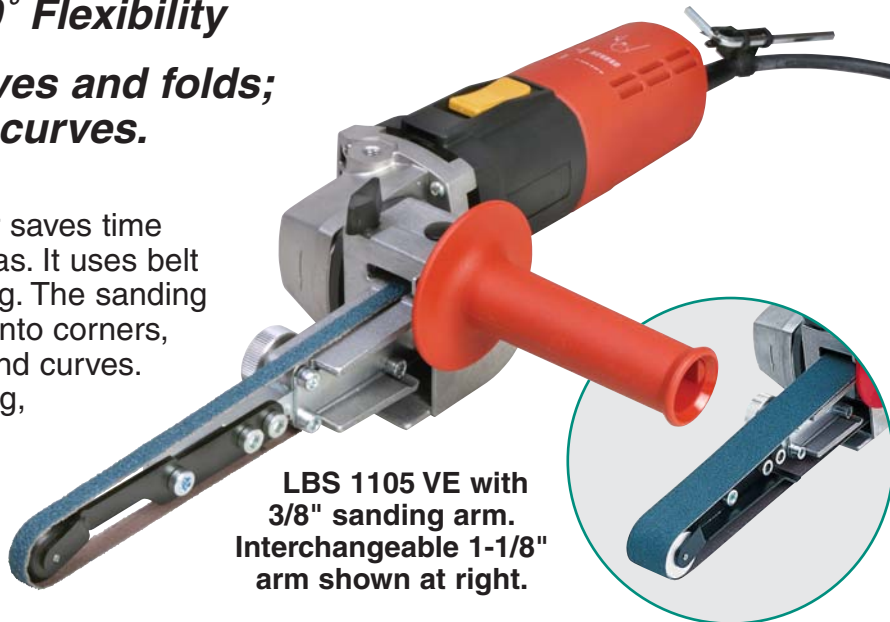

**LBS 1105 VE with
3/8" sanding arm.
Interchangeable 1-1/8"
arm shown at right.**

Accessories



Sanding Belts (10/pk.)

3/16", 60 grit	303.615
3/16", 120 grit	303.623
3/8", 40 grit	257.101
3/8", 60 grit	257.105
3/8", 120 grit	257.102
3/8", 220 grit	257.103

1-1/8", 40 grit	256.538
1-1/8", 60 grit	255.328
1-1/8", 120 grit	255.329
1-1/8", 220 grit	255.330

Sanding Fleece (3/pk.)

3/8", 240 grit	318.663
3/8", 400 grit	318.671
1-1/8", 240 grit	318.647
1-1/8", 400 grit	318.655

Dry Sand/Polish Belts (1/pk.)

1-1/8", 600 grit	318.132
1-1/8", 1500 grit	318.140

**Narrow filing arm
and 140° adjustability
allow sanding and
grinding in confined
and difficult areas.**



**Standard equipment
includes a metal
carrying case.**



Model LBS 1105 VE

Belt Speeds	13-39 ft./sec.
Motor	6.1 AMP
Weight	5.5 lb.
Standard Equipment	
3/8" Sanding Arm (pointed)	256.525
Sanding Belt Kit (40, 120 and 220 grit belts)	1 set
Side Handle	194.034
Hexagon Socket Screw Key	115.460
Optional Equipment	
3/8" Sanding Arm (curved)	256.532
1-1/8" Sanding Arm (small roller)	255.282
1-1/8" Sanding Arm (large roller)	258.888

Note: Specifications subject to change. Refer to Owner's Manual for operating instructions.

CS UNITEC, Inc.

22 Harbor Avenue, Norwalk, CT 06850
Toll Free: (800) 700-5919 Tel: (203) 853-9522 Fax: (203) 853-9921
Website: www.csunitec.com E-Mail: info@csunitec.com