

Portable Mixing Stands Save Time by Running Mixers Independently



Optional 9.25" wide paddle shown

Model 25GP-WD

Designed for easy setup, with no clamping required. Has rear wheels for extra portability. Ideal for use with 5-gallon pails and CS Unitec's EHR 20 R, EHR 23/1.3R or EZR 21 S mixers, as well as all CS Unitec pneumatic mixers.



Size: H-35" L-26" W-14"
Weight: 64 lbs.



Model RST 91

Has an adjustable swing arm and variable height adjustment, allowing use with various size pails. Easily set up. Use with EHR 20 R, EHR 23/1.3R or EZR 21 S electric mixers and all pneumatic mixers.



Size: H-65" L-28" W-20"
Weight: 69 lbs.

Heavy-duty Galvanized Steel Mixing Paddles Mix from the Bottom Up

Mixing paddles can be supplied in different configurations depending on the material to be mixed. They mix the product from the bottom up to prevent air bubbles from being sucked into the material. The paddles are made of robust welded steel and are galvanized for protection against corrosion and resistance against abrasion. These features make them ideal for continuous, professional use. The end result is a perfect blend for the mixing professional.

Thread Connection: 14mm

Paddle Length: All paddles are 24" (9" or 15" extensions are available)

Special Paddles in Stainless Steel are available for Food Applications.

Paddle pair for EZR 21 S: Order No. 31610000

Adapt any paddle to fit your mixer with our 5/8" 3-jaw chuck and 14mm adapter: Order No. 32142999

Low Viscosity



RG 120
4.5" dia.

Ideal for liquid materials with a low viscosity, including wall paints, lacquers, cement paints, chemicals, coating compounds and laitance.

Medium Viscosity



WG 120 4.5" dia.
WG 135 5.4" dia.
WG 160 6.25" dia.

For tenacious materials of a high viscosity such as finished plaster, mortar, gypsum, lime, floor compounds, granulates and quartz-filled epoxy resin.


High Viscosity



MG 120 4.5" dia.
MG 140 5.6" dia.
MG 160 6.25" dia.
MG 235 9.25" dia.

Extra-robust stirring paddle for finished mortar, finished plaster, floor compounds, refractory cements, insulating materials and quartz-filled epoxy resin.

Fold & Stir

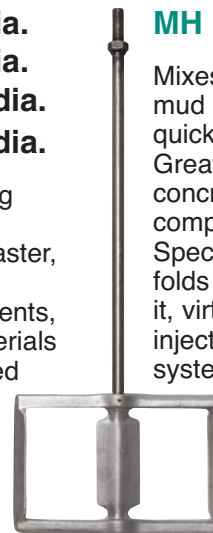

MH 240 9.625" x 6.25"

Mixes all types of drywall mud and textured products quickly and completely. Great for decorative concrete coatings and comparable products. Specially designed blade folds material and then stirs it, virtually eliminating the injection of air into the system. Works in 5 to 55 gallon drums.

UNITEC
... the power of innovation!®

CS UNITEC, Inc.

22 Harbor Avenue, Norwalk, CT 06850

Phone 800-700-5919 • 203-853-9522 • Fax 203-853-9921

Email info@csunitec.com • www.csunitec.com

ALL SPECIFICATIONS ARE SUBJECT TO CHANGE

© Copyright 2008, CS Unitec, Inc., 04-08