

Nut Runners - High Torque

ATEX

Pneumatic and hydraulic: ideal for turning valves, tightening, tapping, reaming, pipe beveling, expanding and more



- Worm gear drive provides high torque – up to 554 ft.-lbs.
- Lightweight and reversible
- Compact angle head allows access to confined spaces



Available with Male or Female Square Drives, in a variety of sizes




Male Sq. Drive Head
1/2" or 3/4"



Female Sq. Drive Head
3/4" or 7/8"

Model numbers pictured above (listed from top to bottom): **6 1055 0075** (with male drive), **6 1055 0010** (female), **6 1014 0075** (with male drive)

Square Drive Accessories

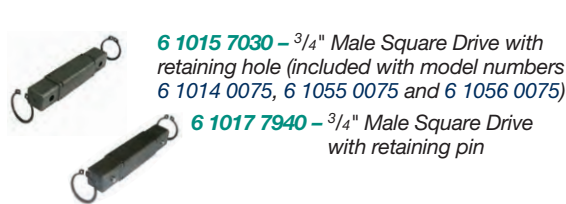

6 1015 7030 – 3/4" Male Square Drive with retaining hole (included with model numbers 6 1014 0075, 6 1055 0075 and 6 1056 0075)

6 1017 7940 – 3/4" Male Square Drive with retaining pin



6 1018 7940 – 1/2" Male Square Drive with retaining pin (included with model numbers 6 1014 0099, 6 1055 0099 and 6 1056 0099)

6 1016 7940 – 1" Male Square Drive

Pneumatic Nut Runner Model No.	Square Drive F=Female M=Male	Stall Torque at 90 PSI (ft.-lbs.)	Free Speed (RPM)	Load Speed (RPM)	Power (HP)	CFM at 90 PSI	Side to Center Distance	Length	Weight (lbs.)	Air Connection	Hose ID
6 1014 0075*	3/4" M	95	200	100	0.9	46	1"	22"	11	3/8" NPT	1/2"
6 1014 0099	1/2" M	95	200	100	0.9	46	1"	22"	11	3/8" NPT	1/2"
6 1055 0075*	3/4" M	405	40	22	0.9	46	1"	21"	10	3/8" NPT	1/2"
6 1055 0099	1/2" M	405	40	22	0.9	46	1"	21"	10	3/8" NPT	1/2"
6 1056 0075*	3/4" M	133	120	67	0.9	46	1"	21"	11	3/8" NPT	1/2"
6 1056 0099	1/2" M	133	120	67	0.9	46	1"	21"	11	3/8" NPT	1/2"
6 1057 0075*	3/4" M	73.5	250	125	0.9	46	1"	21"	11	3/8" NPT	1/2"
6 1057 0099	1/2" M	73.5	250	125	0.9	46	1"	21"	11	3/8" NPT	1/2"
6 1061 0010	7/8" F	405	40	22	0.9	46	1"	21"	11	3/8" NPT	1/2"

* Also available with 3/4" Female Square Drive – use 0010 instead of 0075 in model number.

Hydraulic Nut Runner Model No.	Square Drive F=Female M=Male	Drive Torque (ft.-lbs.)	Free Speed (RPM)	Load Speed (RPM)	Power (HP)	Oil Flow (GPM)	Oil Pressure (PSI)	Side to Center Distance	Length	Weight (lbs.)	Connection Quick Couplers
3 6242 0010*	3/4" F	369	40	22	1.6	4-13	90-2000	1"	20"	22	1/2" FF
3 6243 0010*	3/4" F	125	180	90	1.6	4-13	1300-2000	1"	20"	22	1/2" FF

* Also available with 1/2" (3 6242 0099) and 3/4" (3 6242 0075) Male Square Drive