

# SAFE Striking Wrench

## Hands-Free – Secures itself in any position

 UNITEC




Spring washers keep Safewrench secure on bolt and nut – even upside down

Can be used as a counter-wrench

Drop protection

Use **SAFEWRENCH®** to Prevent Hand Injuries

Operate hammer with 2 hands

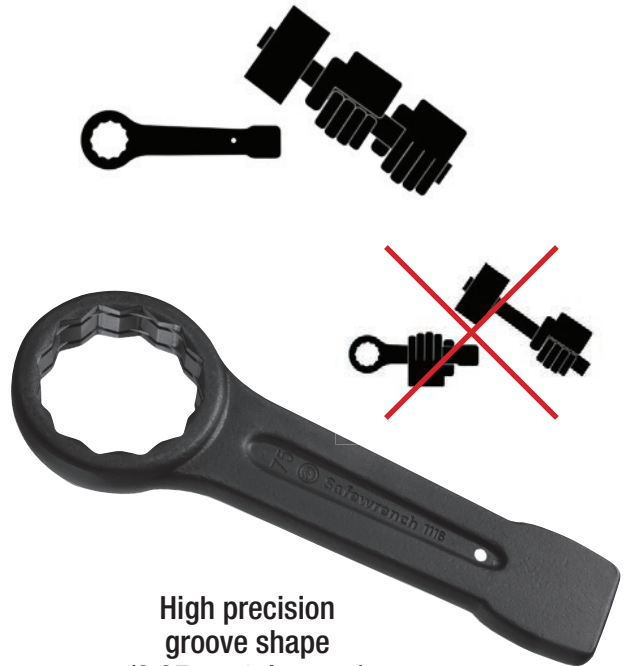

High precision groove shape (0.05mm tolerance)

2 heat-treated steel spring washers for secure grip

12-point grip for maximum contact

 UNITEC

**CS UNITEC, Inc.**

• 22 Harbor Avenue, Norwalk, CT 06850 USA  
• 4330 Center St., Deer Park, TX 77536 USA

Email [info@csunitec.com](mailto:info@csunitec.com)

**800-700-5919 • 203-853-9522**

Manufactured of CRV30 chrome vanadium steel

Black coated surface for maximum rust protection

Sizes in inch: 1-1/4" to 2-3/4" and metric: 24mm to 75mm

[www.csunitec.com](http://www.csunitec.com)

# SAFEWRENCH® Striking Wrench Specs

effective 4/23/2018

| Part No.                        | Bolt Size | Description      | Weight lbs. | Length in. | Width in. | Height in. | Weight kg | Length mm | Width mm | Height mm |
|---------------------------------|-----------|------------------|-------------|------------|-----------|------------|-----------|-----------|----------|-----------|
| <b>US Inch - Imperial Sizes</b> |           |                  |             |            |           |            |           |           |          |           |
| SW-3031S                        | 1-1/4"    | SAFEWRENCH Steel | 0.84        | 7-1/2      | 2         | 2/3        | 0.38      | 190.0     | 50.9     | 17.0      |
| SW-3036S                        | 1-7/16"   | SAFEWRENCH Steel | 1.50        | 8          | 2-1/4     | 3/4        | 0.68      | 205.0     | 57.9     | 19.0      |
| SW-3041S                        | 1-5/8"    | SAFEWRENCH Steel | 1.72        | 9          | 2-1/2     | 5/6        | 0.78      | 225.0     | 62.9     | 20.0      |
| SW-3046S                        | 1-13/16"  | SAFEWRENCH Steel | 2.11        | 9-1/2      | 2-5/6     | 1          | 0.96      | 240.0     | 71.3     | 22.0      |
| SW-3050S                        | 2"        | SAFEWRENCH Steel | 2.44        | 10         | 3         | 1          | 1.11      | 255.0     | 77.1     | 23.0      |
| SW-3055S                        | 2-3/16"   | SAFEWRENCH Steel | 3.15        | 10-3/4     | 3-1/2     | 1          | 1.43      | 272.0     | 87.4     | 25.0      |
| SW-3060S                        | 2-3/8"    | SAFEWRENCH Steel | 3.43        | 10-3/4     | 3-1/2     | 1          | 1.56      | 272.0     | 87.4     | 25.0      |
| SW-3065S                        | 2-9/16"   | SAFEWRENCH Steel | 4.51        | 12         | 4         | 1-1/8      | 2.05      | 300.0     | 97.8     | 28.0      |
| SW-3070S                        | 2-3/4"    | SAFEWRENCH Steel | 5.70        | 13         | 4-1/4     | 1-1/4      | 2.59      | 330.0     | 107.9    | 32.0      |
| <b>Metric Sizes</b>             |           |                  |             |            |           |            |           |           |          |           |
| SW-2024S                        | 24mm      | SAFEWRENCH Steel | 0.48        | 6-3/8      | 1-5/8     | 5/8        | 0.22      | 160.0     | 41.5     | 15.0      |
| SW-2027S                        | 27mm      | SAFEWRENCH Steel | 0.68        | 7          | 1-3/4     | 5/8        | 0.31      | 180.0     | 45.3     | 16.0      |
| SW-2030S                        | 30mm      | SAFEWRENCH Steel | 0.97        | 7-1/2      | 2         | 2/3        | 0.44      | 190.0     | 50.9     | 17.0      |
| SW-2032S                        | 32mm      | SAFEWRENCH Steel | 0.90        | 7-1/2      | 2         | 2/3        | 0.41      | 190.0     | 50.9     | 17.0      |
| SW-2036S                        | 36mm      | SAFEWRENCH Steel | 1.25        | 8          | 2-1/4     | 3/4        | 0.57      | 205.0     | 57.9     | 19.0      |
| SW-2041S                        | 41mm      | SAFEWRENCH Steel | 1.61        | 9          | 2-1/2     | 5/6        | 0.73      | 225.0     | 62.9     | 20.0      |
| SW-2046S                        | 46mm      | SAFEWRENCH Steel | 2.16        | 9-1/2      | 2-7/8     | 1          | 0.98      | 240.0     | 71.3     | 22.0      |
| SW-2050S                        | 50mm      | SAFEWRENCH Steel | 2.55        | 10         | 3         | 1          | 1.16      | 255.0     | 77.1     | 23.0      |
| SW-2055S                        | 55mm      | SAFEWRENCH Steel | 3.39        | 10-3/4     | 3-1/2     | 1          | 1.54      | 272.0     | 87.4     | 25.0      |
| SW-2060S                        | 60mm      | SAFEWRENCH Steel | 3.15        | 10-3/4     | 3-1/2     | 1          | 1.43      | 272.0     | 87.4     | 25.0      |
| SW-2065S                        | 65mm      | SAFEWRENCH Steel | 4.55        | 12         | 4         | 1-1/8      | 2.07      | 300.0     | 97.8     | 28.0      |
| SW-2070S                        | 70mm      | SAFEWRENCH Steel | 6.34        | 13         | 4-1/4     | 1-1/4      | 2.88      | 330.0     | 107.9    | 32.0      |
| SW-2075S                        | 75mm      | SAFEWRENCH Steel | 6.60        | 13         | 4-1/4     | 1-1/4      | 3.00      | 330.0     | 107.9    | 32.0      |



22 Harbor Ave., Norwalk, CT 06850 USA • 4330 Center St., Deer Park, TX 77536 USA • info@csunitec.com

**800-700-5919 • 203-853-9522 • www.csunitec.com**