

ELS 225.1


Long-reach, lightweight drywall sander with dust collection saves time and effort

The ELS 225.1 Drywall Sander with VacuGlide™ suction system prepares wall and ceiling seams with a smooth finish quickly, cleanly and with 60% less effort prior to painting, plastering or decorating.

- Extends up to 9 feet and easily adapts to angles
- 9" disc diameter is ideal for sanding large surface areas
- Spring-mounted dust shroud with sealing lip adapts to the surface, compensates for unevenness and prevents grooving when beginning to sand
- The handle's balanced, ergonomic design allows it to be guided for long periods of time with less operator fatigue, whether working on walls or overhead on ceilings
- Coupled with a dust extraction vacuum, dust-free sanding discs reduce airborne dust for a cleaner and safer working environment

Model ELS 225.1

| | |
|-----------------------|---|
| Power | 5.5 Amp / 110 V |
| Disc Diameter | 9" |
| Variable Speed | 1,050-1,160 RPM |
| Weight | 10.8 lbs. / 3.3 lbs. perceived weight when in use with VacuGlide™ System |

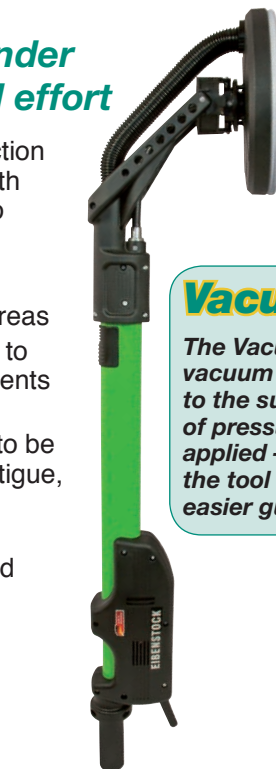

VacuGlide™ System

The VacuGlide™ System's adjustable vacuum suction holds the sander to the surface, reducing the amount of pressure that needs to be applied – the perceived weight of the tool is 3.3 lbs. and allows for easier guiding of the sander.



Additional handle
P/N 37659



Adjustable suction strength and contact pressure for better guiding of the sander on the surface



Spring-mounted dust collection shroud adapts to surface and prevents grooving



Ideal for use with CS Unitec's CS 1225 H HEPA vacuum.
See page 21 for more information.

Sanding Accessories

For ELS 225.1 and ETS 225 9" Drywall Sanders



Base Plate,
6-hole punch
P/N 37631



Rubber Foam Pad,
6-hole punch
P/N 37632





Sanding Grid, 6-hole punch
80 Grit, 10/pk, P/N 37610
120 Grit, 10/pk, P/N 37611



Sandpaper, 6-hole punch,
Aluminum oxide, 24 grit,
10/pk. - P/N 37608

Sandpaper Assortment Pack,
6-hole punch, 5 pieces each:
Grits 80, 100, 120, 150 and 180
P/N 37640

Part Number

| |  |  |
|----------|---|---|
| | Sanding Pad Perforated (10 pieces per pack) | Sandpaper 6-Hole Punch, Corundum (25 pieces per pack) |
| 40 Grit | 37672 | 37642 |
| 60 Grit | 37673 | 37643 |
| 80 Grit | 37674 | 37644 |
| 100 Grit | 37675 | 37645 |
| 120 Grit | 37676 | 37646 |
| 150 Grit | 37677 | 37647 |
| 180 Grit | 37678 | 37648 |
| 220 Grit | 37679 | 37649 |

Drywall Sander, Plaster Smoothers & Board Sander

ETS 225

Lightweight and handy for tight spaces and small rooms

- Special dust hood with detachable segment allows sanding to the edge of the surface
- Motor is located above the sanding disc, away from dust, for longer tool life
- Coupled with a dust extraction vacuum, dust-free sanding discs reduce airborne dust for a cleaner and safer working environment
- Stepless speed control



For sanding accessories, see page 38.



Model ETS 225

| | |
|------------------|---------------|
| Power | 6 Amp / 110 V |
| Disc Diameter | 9" |
| Load Speed | 0-1,450 RPM |
| No-Load Speed | 2,300 RPM |
| Plate Connection | Velcro |
| Weight | 6 lbs. |

Plaster Smoothing Machines

Smooth, scrape and clean plaster surfaces

- Stepless speed control
- 14-1/2" diameter disc for covering large surfaces
- Lightweight
- Balanced handles for easier gliding along the surface



EPG 400



EPG 400 WP

Model EPG 400 WP is equipped with water supply for moistening of the wall with an atomized spray.

Model EPG 400

| | |
|------------------|---------------|
| Power | 5 Amp / 110 V |
| Disc Diameter | 14-1/2" |
| Load Speed | 0-60 RPM |
| No-Load Speed | 110 RPM |
| Plate Connection | Velcro |
| Weight | 7.7 lbs. |

Accessories for Plaster Smoothing Machines

Base Plate (14-3/4" dia.) - P/N 37721
 Sponge Disc (15-3/4" dia.) - P/N 37722
 Sponge Rubber Disc (15" dia.) - P/N 37725
 Scraping Disc (15" dia.) - P/N 37726
 Sanding Disc (14-3/4" dia., 24 grit) - P/N 37727
 Scratching Disc (14-3/4" dia.) - P/N 37724
 Smoothing Disc (15" dia.) - P/N 37728
 Felt Disc (14-1/2" dia.) - P/N 37729

Insulation Board Sander

Sand foamed polystyrene and insulation

- Powerful, high-torque motor with stepless speed control
- Dust hood with brush rim, perforated sanding discs and dust extraction port allow for dust-free sanding when connected to industrial vacuum
- 14-1/2" diameter disc for covering large surfaces



Model EWS 400

| | |
|------------------|---------------|
| Power | 7 Amp / 110 V |
| Disc Diameter | 14-1/2" |
| Load Speed | 0-85 RPM |
| No-Load Speed | 140 RPM |
| Plate Connection | Velcro |
| Weight | 8.5 lbs. |

Model EWS 400 is supplied with one (1) 24 grit sandpaper



**Sandpaper, 24 grit
 4-hole punch -
 3 pieces/pack
 P/N 37671**