

# PIPE-MAX

## Pipe Belt Grinder

The PIPE-MAX is a combination grinder and pipe belt sander. The front hard rubber contact roller drives the abrasive belt to grind flat surfaces. It removes weld seams in a straight line, without leaving edges or a wavy finish.

For sanding pipes or handrails, it is a flexible tool. The sanding belt follows every contour to grind and polish up to a high-gloss finish. The belt wraps around the pipe and requires only a few steps to polish the entire circumference. It is ideal for stainless steel, aluminum and high-quality metals.

- For sanding pipes from small to large diameter, up to 14"
- Grinds weld seams on flat surfaces – leaves no edges
- Powerful 14.5 Amp motor and variable-speed control from 950 to 3500 RPM
- Quick and easy changing of sanding belts
- Ideal for stainless steel and aluminum



You can follow the external contour of the pipe diameter with light, uniform contact pressure. The new contour concept with the elastic return roller allows the grinding and polishing belts to conform around the external diameter of the pipes without great force.



1 Gas pressure cylinder allows belt to conform to contour of pipe with proper pressure.




2 Additional handle for comfortable, overhead working.



3 The drive roller with the rubber rings ensures that the grinding belts will not slip.



The soft grinding roller made of PUR material also allows comfortable longitudinal grinding of flat surfaces, for example to remove spot welds or eliminate deep scratches.

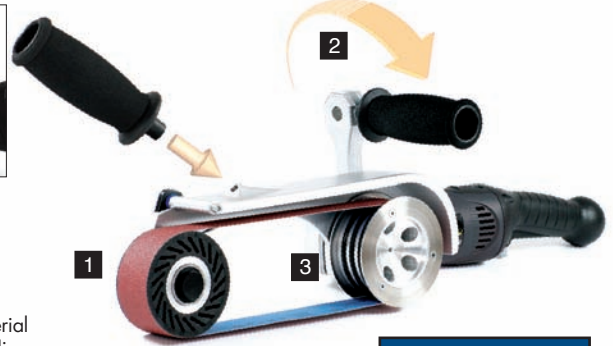

**Pneumatic Pipe Sander (LBR1506 AIR)**  
also available.  
See price list for details.

### PIPE-MAX Specifications

Order Number: 38502A	
<b>Belt size (L x W)</b>	30.7" x 1.6"*
<b>Belt speed</b>	33 - 100 ft./sec.
<b>Power</b>	14.5 Amp (1600 Watts) 110V
<b>Pipe ø max.</b>	14"
<b>Weight</b>	11.25 lbs.

### Standard Equipment

1 PIPE-MAX basic machine, 110 V	2 PIPE-MAX SC-fleece belts, medium
1 QUICK-LOCK cable, 13 feet	2 PIPE-MAX SC-fleece belts, fine
1 additional handgrip	3 spare rubber rings
PIPE-MAX grinding belts, 2 each grits 40, 60, 80 and 120	

220 Volt also available. \* Note: Exact belt size is 40mm x 780mm

### PIPE-MAX Accessories

#### Abrasive Grinding Belts (10/pkg.)

Size	Grit	Part No.
30.7" x 1.6"	40	38524
30.7" x 1.6"	50	38525
30.7" x 1.6"	60	38526
30.7" x 1.6"	80	38528
30.7" x 1.6"	120	38529

#### Surface Conditioning Fleece Belt (10/pkg.)

Size	Grit	Part No.
30.7" x 1.6"	Coarse (brown)	38531
30.7" x 1.6"	Medium (red)	38532
30.7" x 1.6"	Fine (blue)	38533
30.7" x 1.6"	Superfine (grey)	38534

#### TZ Pyramid Belt (10/pkg.)

Size	Grit	Part No.
30.7" x 1.6"	A45/400	38546
30.7" x 1.6"	A30/600	38547
30.7" x 1.6"	A16/1200	38548

Size	Part No.
30.7" x 1.6"	38550

**QUICK-LOCK Cable** (Qty: 1) Length: 10 ft. (standard, included)