

# PIPE-MAX

## Pipe Belt Grinder

The PIPE-MAX is a combination grinder and pipe belt sander. The front hard rubber contact roller drives the abrasive belt to grind flat surfaces. It removes weld seams in a straight line, without leaving edges or a wavy finish.

For sanding pipes or handrails, it is a flexible tool. The sanding belt follows every contour to grind and polish up to a high-gloss finish. The belt wraps around the pipe and requires only a few steps to polish the entire circumference. It is ideal for stainless steel, aluminum and high-quality metals.

- For sanding pipes from small to large diameter, up to 14"
- Grinds weld seams on flat surfaces – leaves no edges
- Powerful 15 Amp motor and variable-speed control from 950 to 3500 RPM
- Quick and easy changing of sanding belts
- Ideal for stainless steel and aluminum



You can follow the external contour of the pipe diameter with light, uniform contact pressure. The new contour concept with the elastic return roller allows the grinding and polishing belts to conform around the external diameter of the pipes without great force.



1 Gas pressure cylinder allows belt to conform to contour of pipe with proper pressure.




2 Additional handle for comfortable, overhead working.



3 The drive roller with the rubber rings ensures that the grinding belts will not slip.



The soft grinding roller made of PUR material also allows comfortable longitudinal grinding of flat surfaces, for example to remove spot welds or eliminate deep scratches.

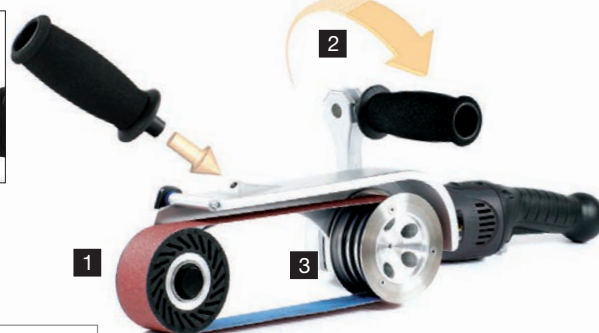

**Pneumatic Pipe Sander also available.**  
**(LBR1506 AIR)**  
See price list for details.

### PIPE-MAX Specifications

**Part Number: 38502A**

<b>Belt Size (L x W)</b>	30.7" x 1.5"
<b>Belt Speed</b>	33 - 100 ft./sec.
<b>Power</b>	15 Amp (1710 Watts) 110V
<b>Pipe ø Max.</b>	14"
<b>Weight</b>	11.25 lbs.

### Standard Equipment

1 PIPE-MAX basic machine, 110V	2 PIPE-MAX SC-fleece belts, medium
1 QUICK-LOCK cable, 13 feet	2 PIPE-MAX SC-fleece belts, fine
1 additional handgrip	3 spare rubber rings
PIPE-MAX grinding belts, 2 each grits 40, 60, 80 and 120	

*220 Volt also available. \*Note: Exact belt size is 780mm x 40mm.*

### PIPE-MAX Accessories

All PIPE-MAX Belts shown below: Belt Size – 30.7" x 1.5" (780mm x 40mm) • 10 belts per package

Abrasive Grinding Belts		Abrasive Surface Conditioning Fleece Belts		Abrasive Grinding Belts – Ceramic		TZ Pyramid Belts		SuperPolish Belt	
Grit	Part No.	Grit	Part No.	Grit	Part No.	Grit	Part No.	Part No.	
24	38523	Coarse (brown)	38531	24	38124	A100/220	38544		38850
40	38524	Medium (red)	38532	36	38136	A65/320	38545		
50	38525	Fine (blue)	38533	40	38140	A45/400	38546		
60	38526	Superfine (grey)	38534	60	38160	A30/600	38547		
80	38528			80	38180	A16/1200	38548		
120	38529			100	38100				

**QUICK-LOCK Cable** (Qty. 1) – Length: 13 ft. (standard, included)